





724 SERIES
2-4 POWER ADJUSTABLE
DOOR CLOSER



TRANSOM FIXING
(RIGHTHAND DOOR PUSH SIDE)



REGULAR FIXING
(LEFT HAND DOOR PULL SIDE)

Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns	Direction
EN2	850mm	40kg	180°	13Nm	8	Anti - Clockwise
EN3	950mm	60kg	180°	18Nm	-	-
EN4	1100mm	80kg	180°	26Nm	7	Clockwise

222

185

45

44

FOR OVER DOOR INSTALLATION
TURN TEMPLATE THIS WAY UP
(Min. Door Frame 63mm)



TOP OF DOOR



DOOR


DOOR FRAME

17

43

TRANSOM FIXING (PUSH SIDE)
REGULAR FIXING (PULL SIDE)


100

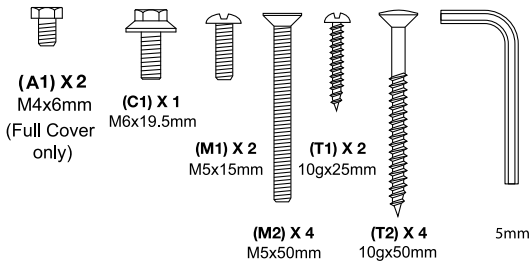

M = METAL T= TIMBER

Timber	drill Ø3
Metal	drill Ø4.2 and tap M5


1 Align template to door.
Mark & drill 4 mounting holes and 2 bracket holes as indicated on this sheet.

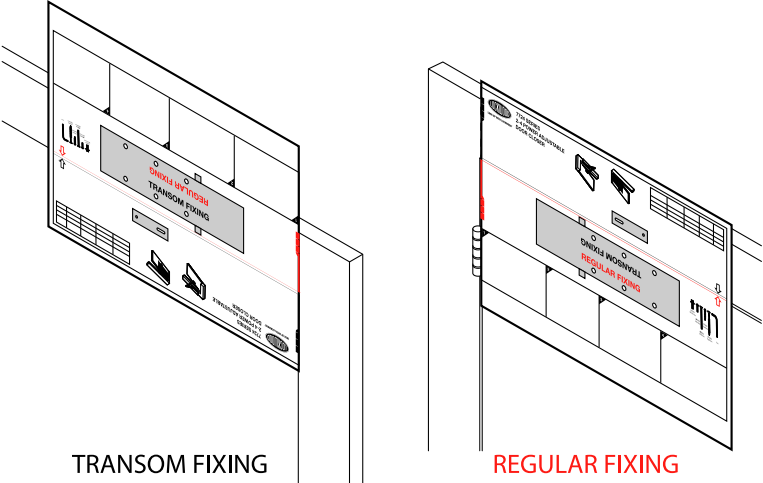


TRANSOM FIXING

REGULAR FIXING

2 Screw body in place using screws as shown.
Install arm and securely tighten.
Separate and adjust threaded link arm 90° to door face.

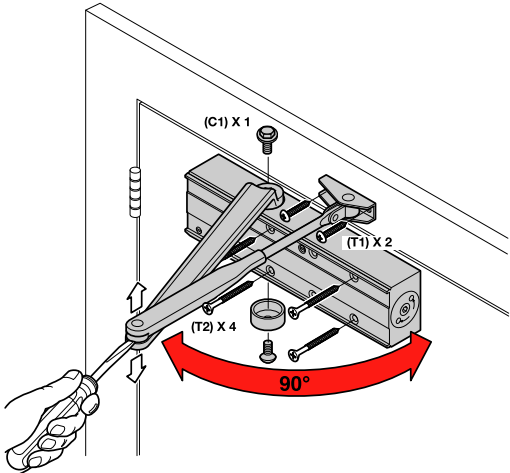


3 Adjust door controls to suit conditions.

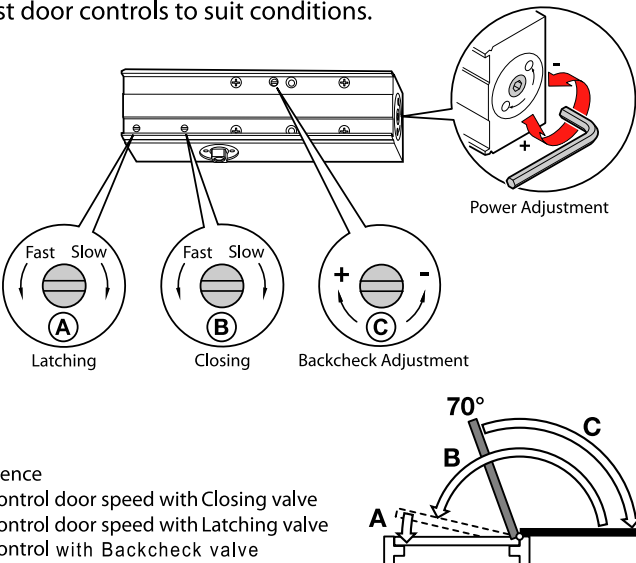

Closing sequence
180° - 15° Control door speed with Closing valve
15° - 0° Control door speed with Latching valve
70° - 180° Control with Backcheck valve



4 • Fit front cover - clip on bottom first

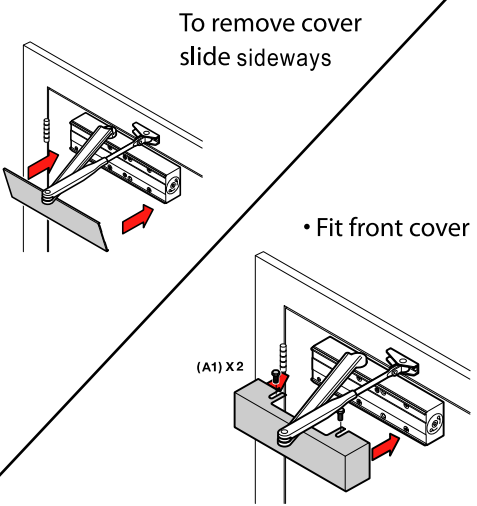

• Fit front cover

Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns	Direction
EN2	850mm	40kg	180°	13Nm	8	Anti - Clockwise
EN3	950mm	60kg	180°	18Nm	-	-
EN4	1100mm	80kg	180°	26Nm	7	Clockwise

724 SERIES
2-4 POWER ADJUSTABLE
DOOR CLOSER

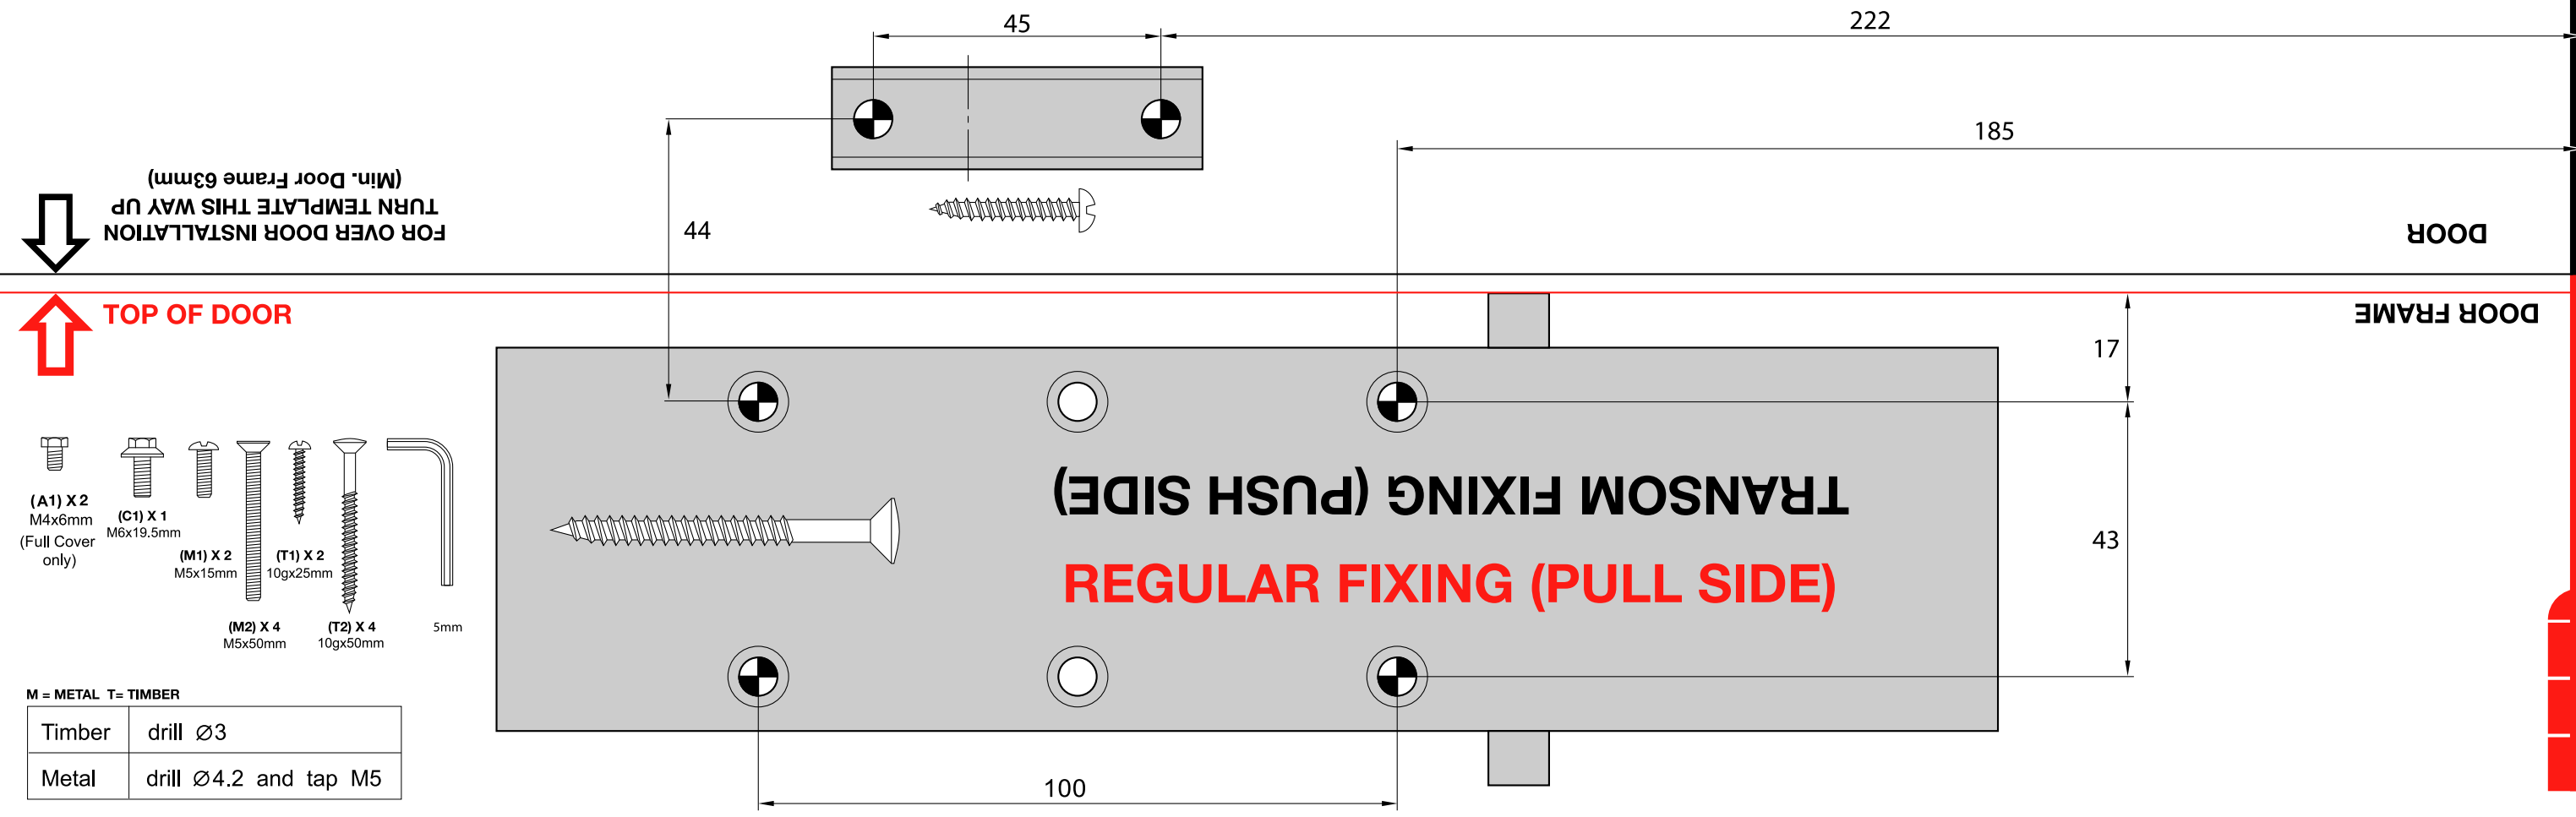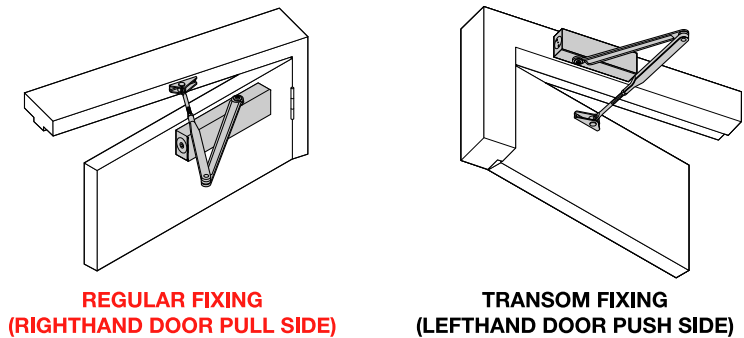

- (A1) X 2 M4x6mm (Full Cover only)
- (C1) X 1 M6x19.5mm
- (M1) X 2 M5x15mm
- (T1) X 2 10gx25mm
- (M2) X 4 M5x50mm
- (T2) X 4 10gx50mm
- 5mm

M = METAL T= TIMBER

Timber	drill Ø3
Metal	drill Ø4.2 and tap M5

1 Align template to door. Mark & drill 4 mounting holes and 2 bracket holes as indicated on this sheet.

2 Screw body in place using screws as shown. Install arm and securely tighten. Separate and adjust threaded link arm 90° to door face.

3 Adjust door controls to suit conditions.

Power Adjustment

Backcheck Adjustment (C)

Closing (B)

Latching (A)

Closing sequence

- 180° - 15° Control door speed with Closing valve
- 15° - 0° Control door speed with Latching valve
- 70° - 180° Control with Backcheck valve

4 • Fit front cover - clip on bottom first

• Fit front cover

To remove cover slide sideways