



Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns	Direction
EN1	750mm	20kg	180°	9Nm	8	Anti - Clockwise
EN2	850mm	40kg	180°	13 Nm	-	-
EN3	950mm	60kg	180°	18 Nm	7	Clockwise




PARALLEL FIXING
(RIGHT HAND DOOR PUSH SIDE)

7714 SERIES PARALLEL 1-3 POWER ADJUSTABLE DOOR CLOSER



FOLD HERE DOOR FRAME

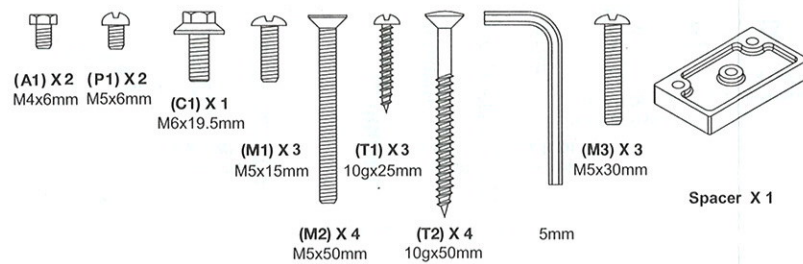

M = METAL T= TIMBER

Timber	drill Ø3
Metal	drill Ø4.2 and tap M5

58

43

PARALLEL FIXING
(PUSH SIDE)


100

75


130

DOOR FRAME


- 1** Align template to door. Mark & drill 4 mounting holes and 3 bracket holes as indicated on this sheet.

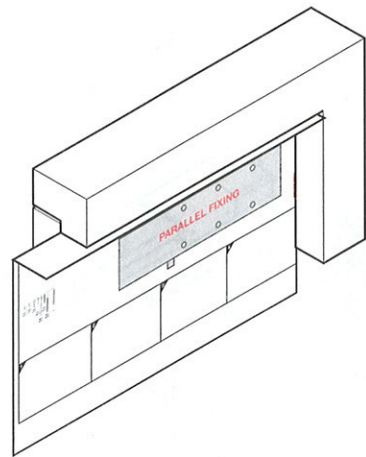

- 2** Screw body in place using screws as shown. Install bracket and securely tighten.

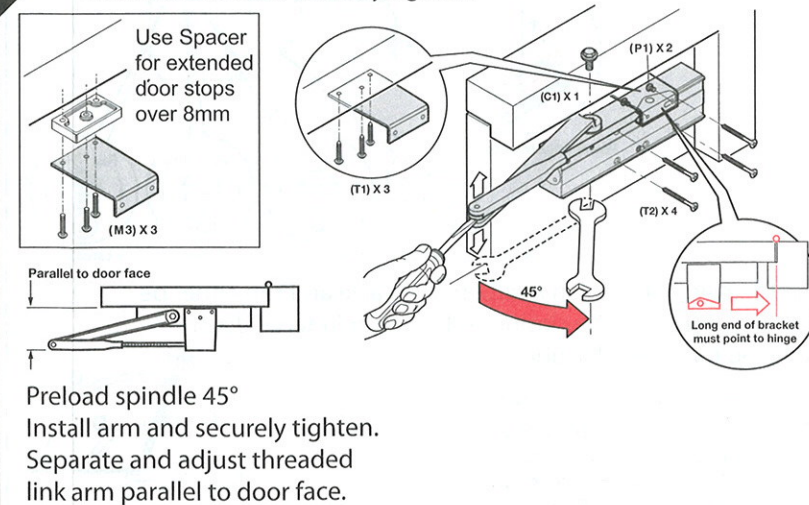


- 3** Adjust door controls to suit conditions.

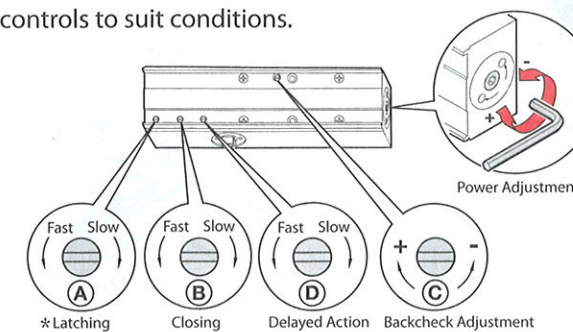


The Delayed Action is an independent valve and can either be adjusted as part of the closing sequence or independently adjusted for delayed action

Closing sequence with Delayed Action
180° - 70° Control door speed with Delayed Action valve
70° - 15° Control door speed with Closing valve
70° - 180° Control with Backcheck valve


*With parallel bracket installation, latching valve will not function.




- 4** Fit front cover

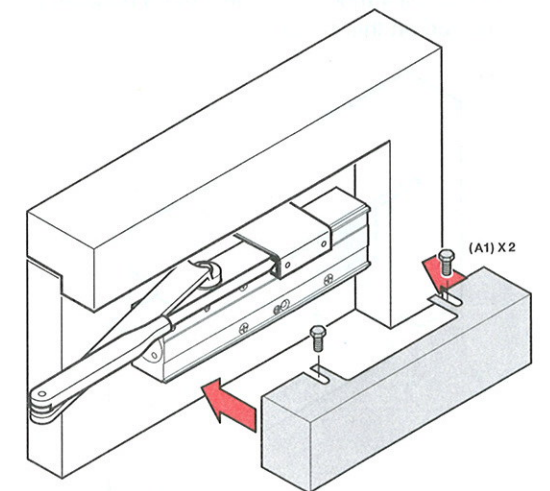

FOLD HERE



7714 SERIES PARALLEL 1-3 POWER ADJUSTABLE DOOR CLOSER





PARALLEL FIXING
(LEFT HAND DOOR PUSH SIDE)

Power Size	Max. Door Width	Max. Door Weight	Max. Door Opening	Min. Closing Torque	Number Turns	Direction
EN1	750mm	20kg	180°	9Nm	8	Anti-Clockwise
EN2	850mm	40kg	180°	13Nm	-	-
EN3	950mm	60kg	180°	18Nm	7	Clockwise

DOOR FRAME


DOOR FRAME FOLD HERE

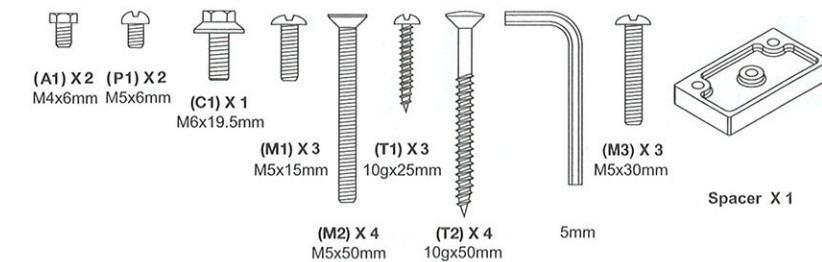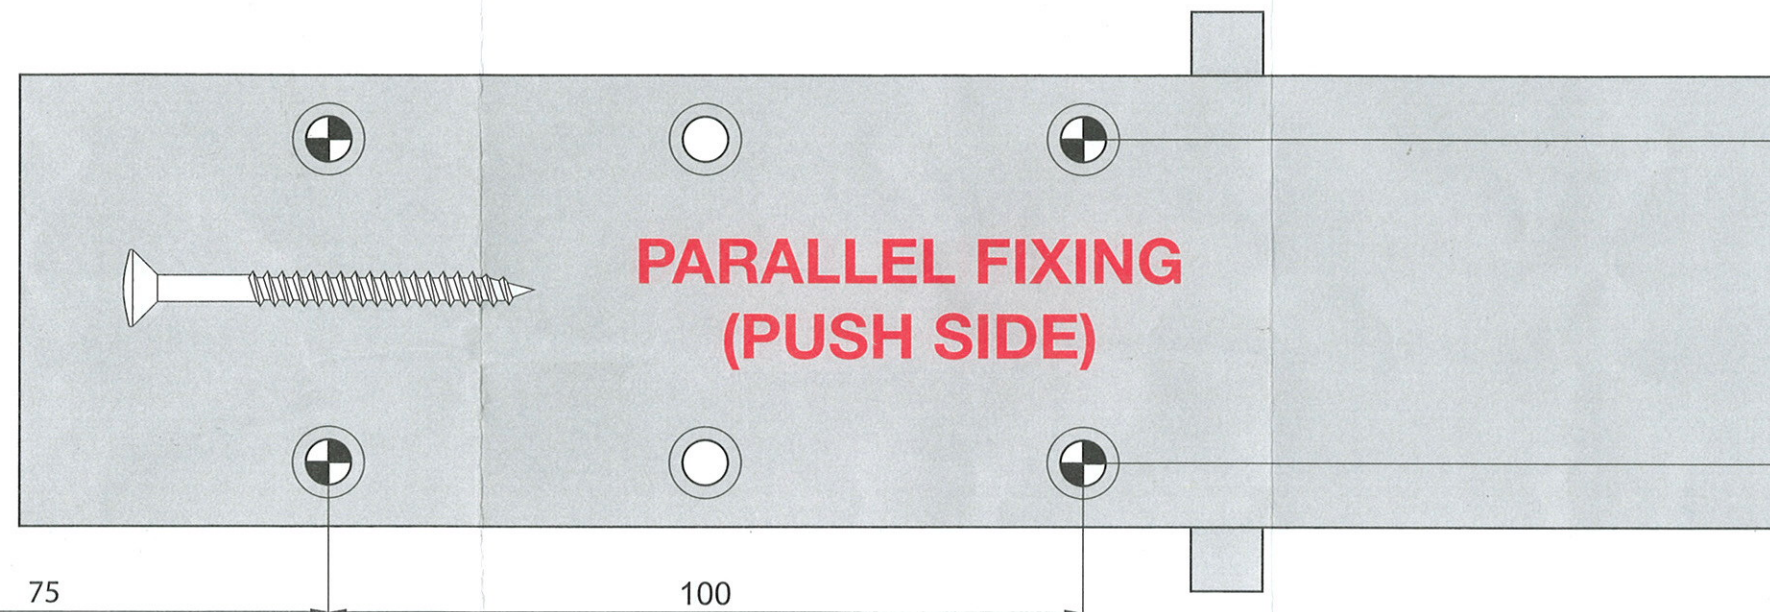


M = METAL T= TIMBER

Timber	drill Ø3
Metal	drill Ø4.2 and tap M5


1 Align template to door.
Mark & drill 4 mounting holes and 3 bracket holes as indicated on this sheet.

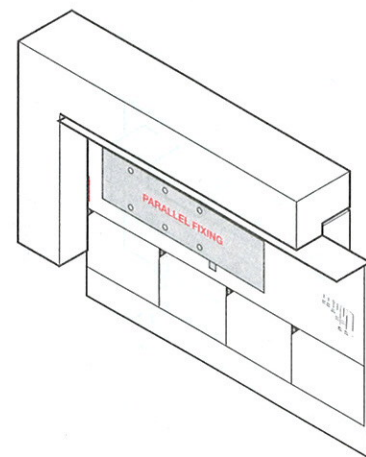

2 Screw body in place using screws as shown.
Install bracket and securely tighten.

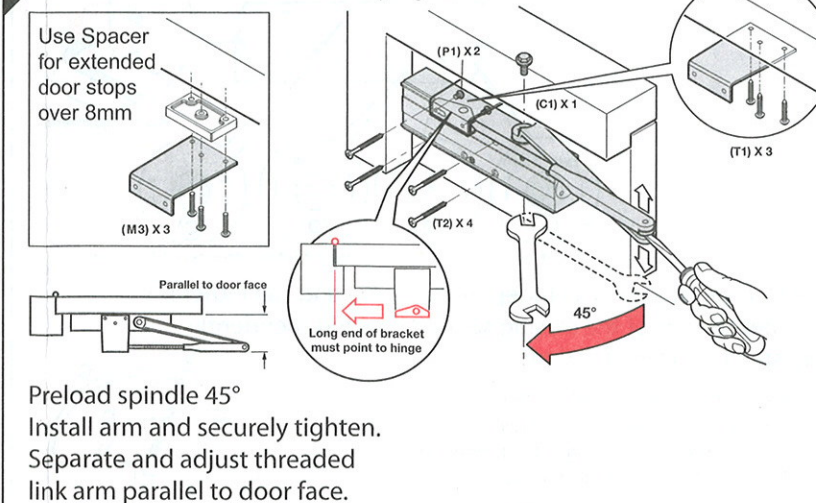

3 Adjust door controls to suit conditions.

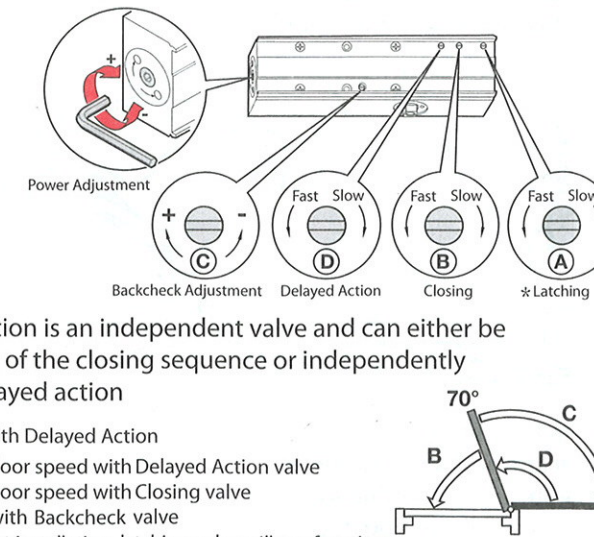

4 Fit front cover

