

SOLTAIRE 120

For top hung sliding doors. Max 120kg each.

APPLICATION

- Manufactured from high grade 316 stainless steel with anodised aluminium track
- This reliable system is extremely durable and ideal for coastal applications, heavy use or areas requiring a high level of corrosion resistance
- Designed for interior and exterior doors up to 120kg
- Ideal for residential or commercial applications
- Designed to accommodate single or multiple panels on one or more tracks
- Hangers available for MDF, timber or metal doors
- The track can be soffit fixed or face fixed to give flexibility of installation
- Optional telescopic kit links passing panels allowing them to traverse simultaneously
- Optional soft stop damper gently decelerates the door and draws into the open or closed position

DOOR SPECIFICATION

Track System **Soltaire120**

For Individual Doors:

Max Door Weight	120kg
Door Thickness	19-48mm*
Max Panel Height	3000mm


* For doors thicker than 48mm, please contact our technical sales team for further information.


HARDWARE SPECIFICATION

Track	H120N	Track no brush, Anodised Aluminium (2, 3, 4, 6mtr lengths)
	H120A	Track for brush strip anodised Aluminium (2, 3, 4, 6mtr lengths) Soffit fix spacing 600mm centres (maximum)
Brush Strips	HBS10, HBS15, HBS20, HBS25	Available in black in 4 brush heights, by the metre
Brackets	H1/SS	Face fixed stainless steel
	H5/SS	Double run face fixed stainless steel Starting 20mm from end of track fix at 600mm maximum centres.
Hangers (2 per door)*	H51/120/SS	Timber Doors – top fix – surface mounted
	H52/120/SS	MDF Doors – face fixing
	H56/120/SS	Metal Doors – angle frame fixing
	H57/120/SS	Timber Doors – concealed plate fixing

* Each panel must be rigid enough to be supported by only two hangers

Track Stop	HH4/SS	Anodised aluminium with rubber buffer
Guides	H101N	Nylon saw cut guide
	H102SS/94	Timber doors - wall mounted and multiple run guide
	H104P/89	Metal door - angle frame
	H104PX/89	Metal door - box section
	H105SS/94	Timber doors - face mounted guide
Channels	H106SS/94	Timber doors - concealed fixing with SS bearing
	H89SS	Stainless steel (2000 & 3000mm length)
	H94X	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H94	Brass (1500 & 3000mm lengths)
	H94P	Polypropylene (2000, 3000, 4000 & 6000mm lengths)
Accessories	H94PSC	Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)
	H59BZ/4800	Interlocking Seal
Soft Close Damper and Hanger Kit	H59CA/4800	Clear anodised (4800mm to suit typical 2400mm door height) Drilled and countersunk. Includes brush seal.
	H57D80	Single damper kit, incl 2 x 57 hangers and 2 x stops
	H57D80D	Double damper kit, incl 2 x 57 hangers and 2 x stops (max door weight with soft close is 80kg)

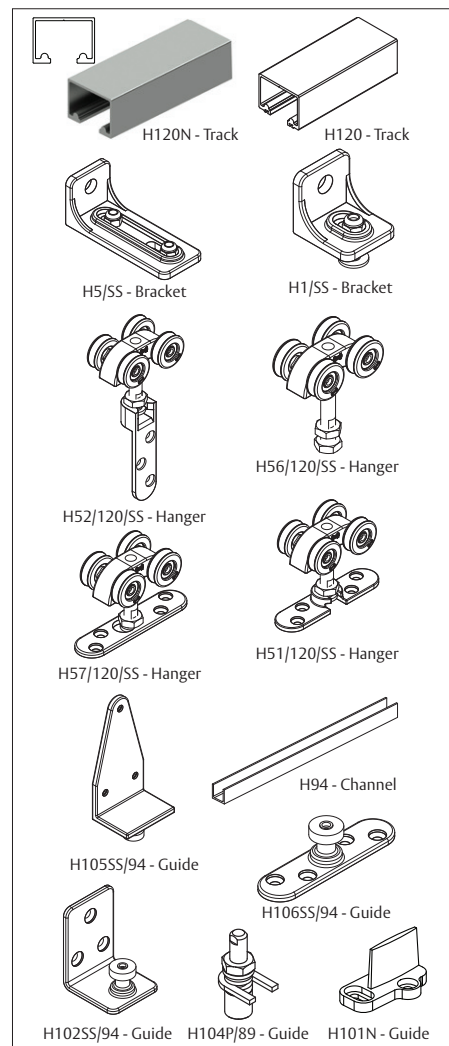

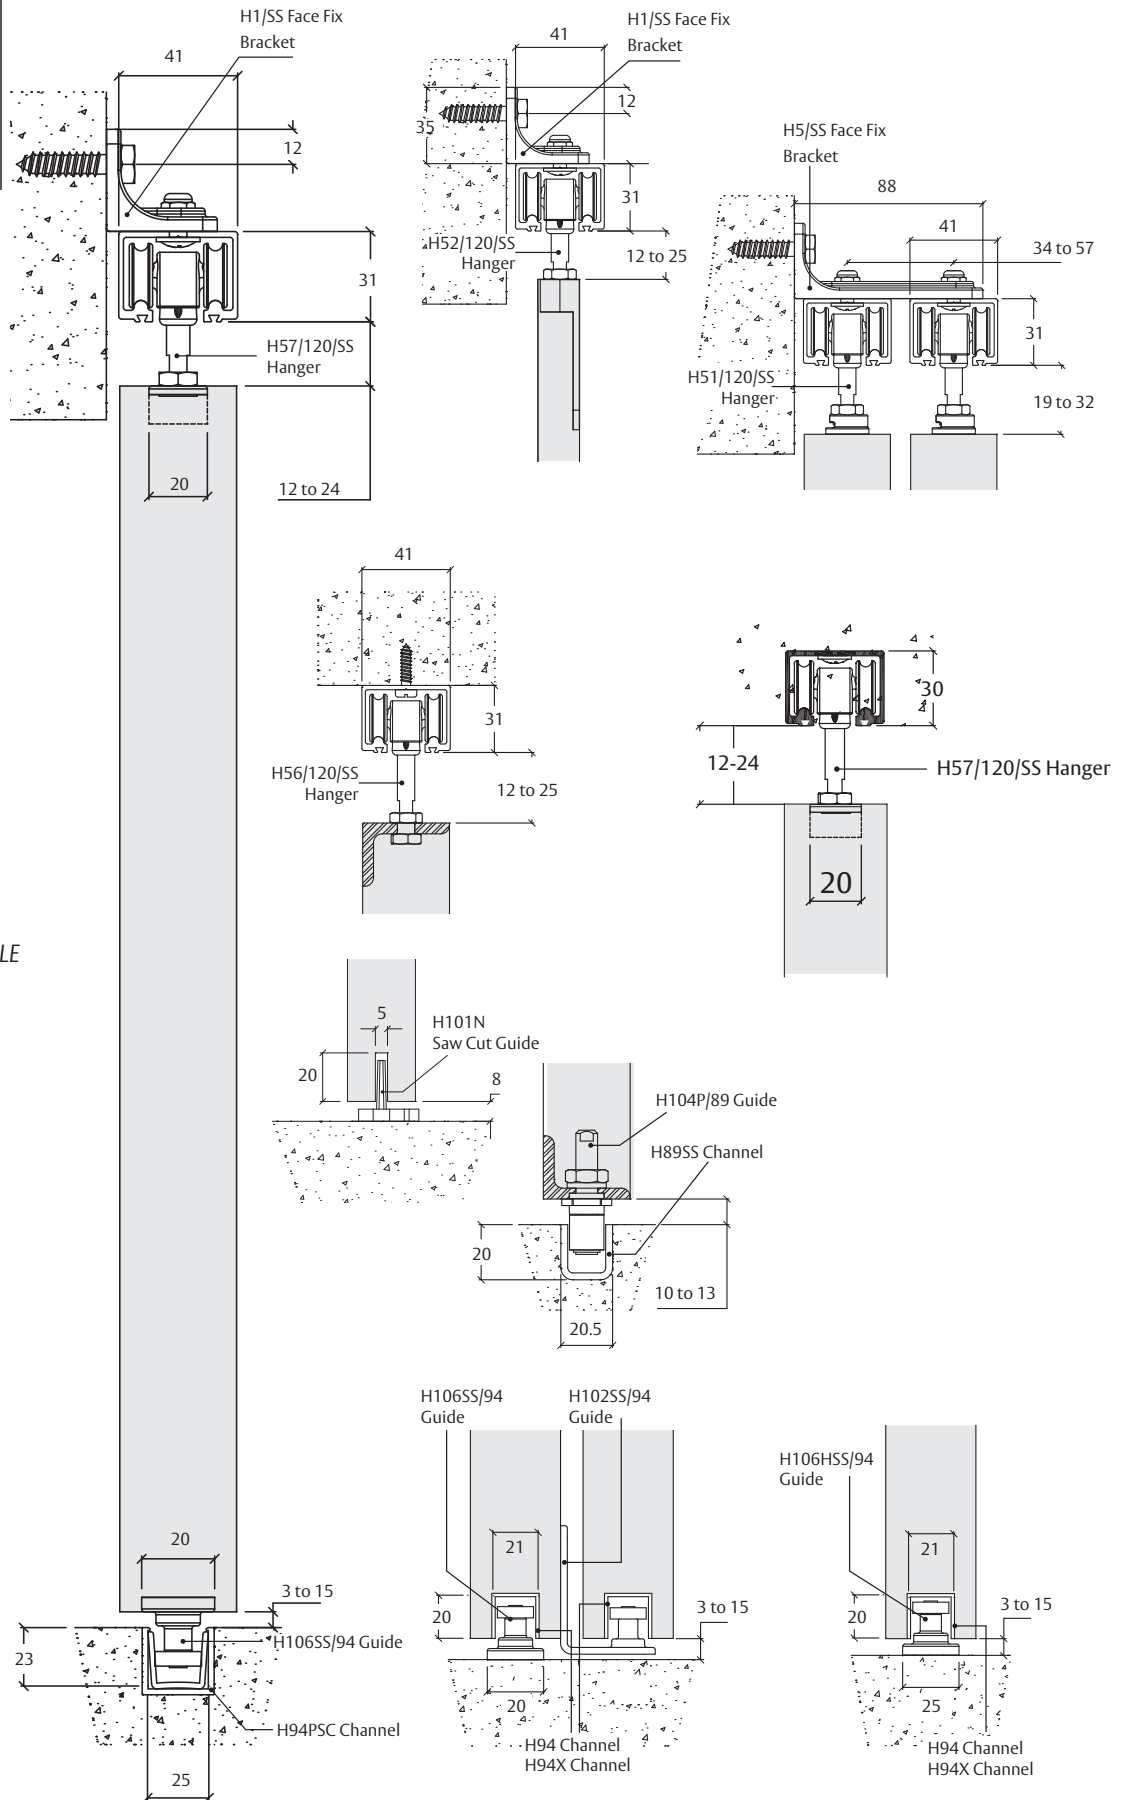

NOT TO SCALE