


Selector® 3700 Series Mortice Locks




ASSA ABLOY

Selector® 3770 Series Mortice Locks


Selector® 3770 Mortice Nightlatches

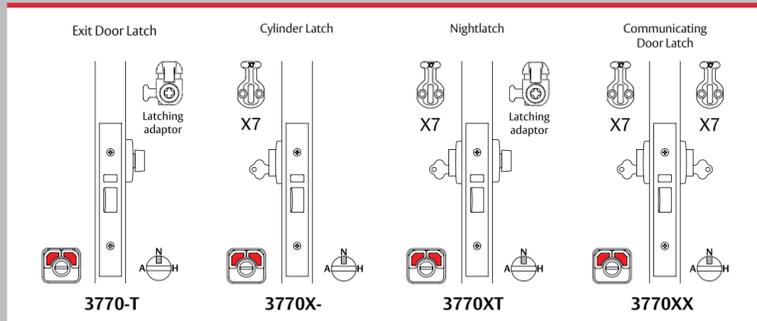


Selector® 3772 Escape Locks

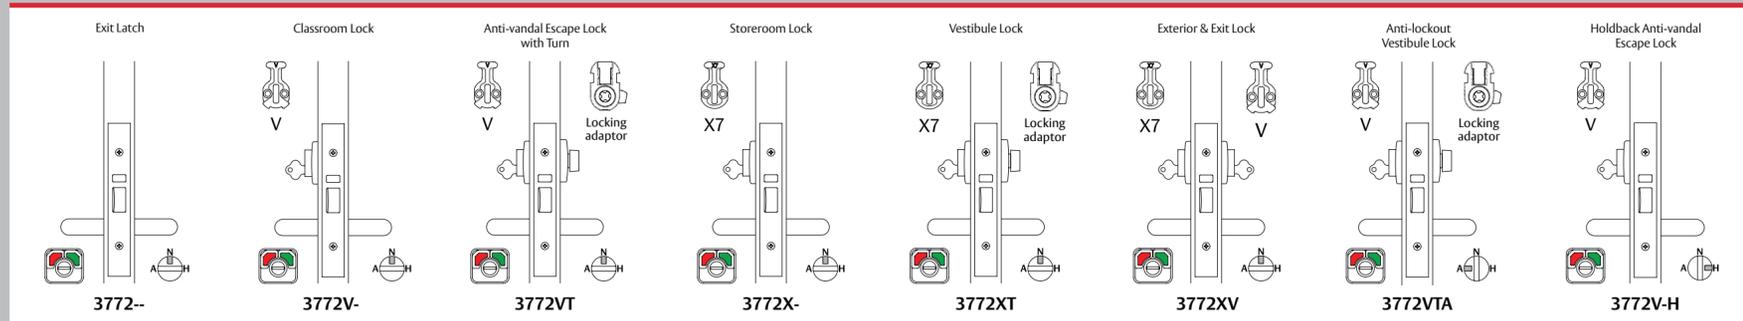


Selector® 3774 Passage Latches




Selector® 3774 Combination Locks

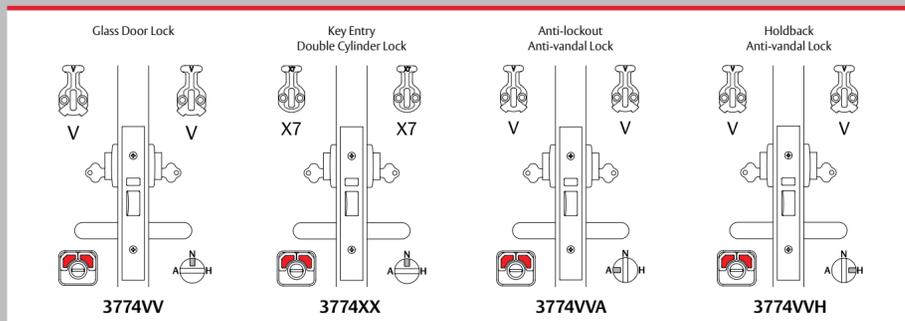

Selector® 3777 Dual Entry Locks

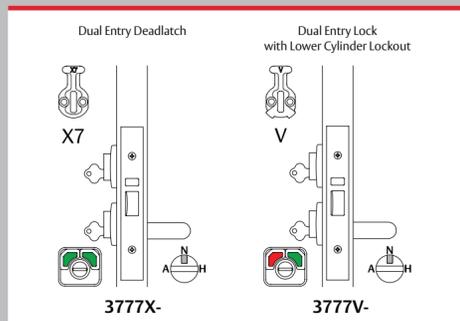


Selector® Privacy Locks

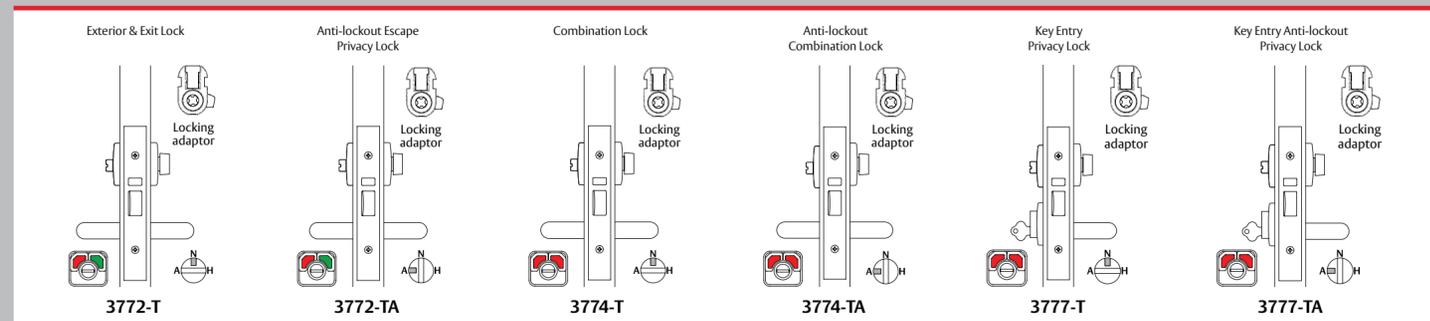


Selector® 3780 Series Mortice Locks


Selector® 3782 Escape Locks

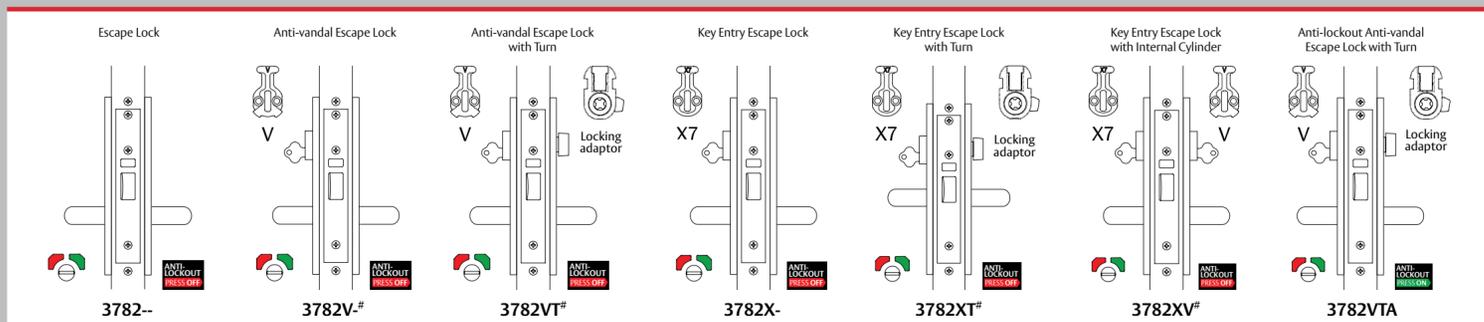

Selector® 3784 Combination Locks

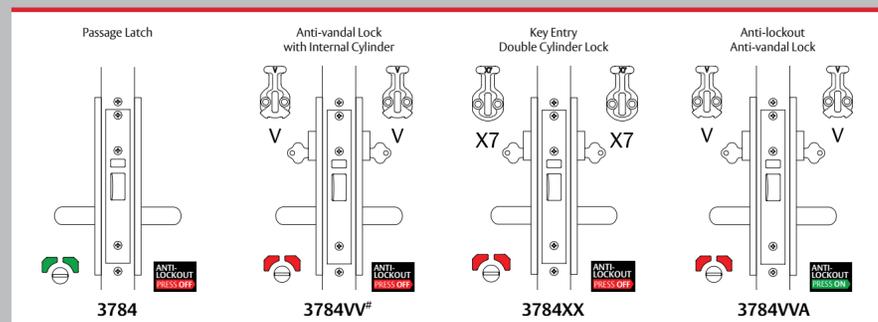


Selector® 3787 Dual Entry Locks

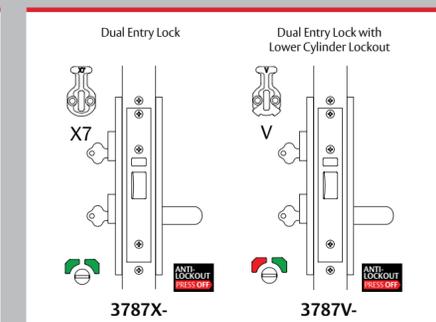


#Lock function recommended for holdback application.
All drawings shown are in right hand configuration.

Cylinder Cams

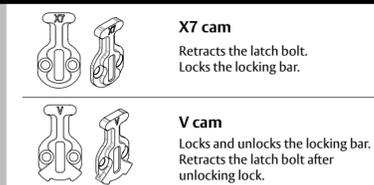

Turn Adaptors

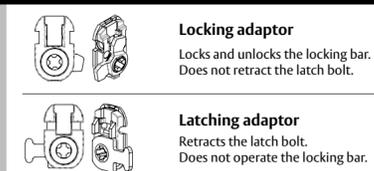

Setting and Operating Instructions

SETTING THE LOCK

To set all Selector settings:

- Ensure locking bar is in the unlocked position (up)
- Remove faceplate
- Requires the use of a 4mm flat blade screwdriver to operate settings

HUB SETTING

Lockable ← → Escape

LOCK FUNCTIONS

N
Neutral - Standard Lock

A **H** **ANTI-LOCKOUT PRESS OFF**

Anti-lockout - Closing door or retracting latch bolt unlocks lock, preventing lockout situations

N **A** **H** **ANTI-LOCKOUT PRESS ON**

Holdback - Latch bolt can be held within lock

HOLDBACK OPERATION

To activate
- Depress latch bolt and lock locking bar

To de-activate
- Unlock locking bar

3780 series locks are always holdback capable, unless anti-lockout is selected.

Holdback must not be activated in fire doors.

*For questions concerning our fire rated products, their specifications and their utilization please contact ASSA ABLOY or relevant Fire Door Manufacturer.

Function Matrix

Sample part number 3782VTASS is made up of seven elements.

Backset	Series	Platform	Function	Sub Function	Lock Function Setting	Finish
3	7	8	2	VT	A	SS

Backset	Series	Platform	Functions	Sub Function	Lock Function Setting	Finish
Standard Backset	Selector® Series	Standard Backset	Nightlatch	e.g. Outside	Standard Backset	Stainless Steel
60mm	Mortice Locks	7	Escape Lock	Inside	Neutral	SS
89mm		8	Combination Lock	V	Anti-lockout	
127mm			Dual Entry Lock	T	Holdback	
				X		
				-		
				DX		
				DXKO		