

Yale Securiturn™
The Removable Turnknob

10 YEARS
WARRANTY

fold line

Yale Securiturn™
The Removable Turnknob

10 YEARS
WARRANTY

Securiturn™

The Removable Turnknob

Securiturn™ - Provides security with safety by providing immediate exit when installed in inside cylinder. Provides security when premises unoccupied as Securiturn™ can be removed by inserting the release key and withdrawing Securiturn™.

Note: Store in a safe place when not in use.

Preparing Securiturn™

Your local locksmith will prepare the Securiturn™ key to your current key cuts. Securiturn can then be used on your inside lock cylinder fitted with a standard LW4 keyway.

An ASSA ABLOY Group brand

MC35L5SC

fold line


Safety Note:

The release key opens in a similar way to a pocket knife, as a child safety feature.



Locksmith Notes:

Prepare vertical trap cut by filing back the leading face of selected pin cut to allow pin to drop to bottom of cut.



Use number 2, 3, 4 or 5 key cut with a number 3-pin depth or greater.

Note: On 6-pin key do not use last pin cut as the trap position.

fold line



Safe

Insert Securiturn™ in inside cylinder.



Secure

Use release key to remove Securiturn™.

fold line

Securiturn™ Applications:

Securiturn™ can only be used to add safety with security to the types of lock cylinders shown below, using the common LW4 Australasian keyway.



Oval Cylinder



Deadbolt Cylinder



Euro "E" Cylinder
See note:
(1B to 3B)

Safe Plug

In commercial premises and in some domestic situations, a permanent Turnknob may be required. The red Safe Plug supplied with every Securiturn™ can be inserted (with Securiturn™ disassembled) into the release key slot (from the inside). With Safe Plug in place Securiturn™ cannot be removed.



fold line

Yale Securiturn™
The Removable Turnknob

Provides security with safety for double cylinder locks fitted with standard LW4 cylinders.

MC35L5SC



ASSA ABLOY New Zealand Limited
6 Armstrong Road, Albany
Auckland 0632, New Zealand
www.yalelock.co.nz

For customer feedback: info.nz@assaabloy.com

ASSA ABLOY

Q25122 YALE 0412

fold line

fold line

fold line

fold line


fold line




Securiturn™ MC35L5SC: Securiturn™ operates with most double cylinder locks that use a standard LW4 keyway. Not recommended for Standard Euro cylinders in some situations - See note (3B). **Note:** Securiturn™ must be vertical before inserting release key.

Instructions - For use with standard LW4 Keyway Cylinder


Inserting Securiturn™

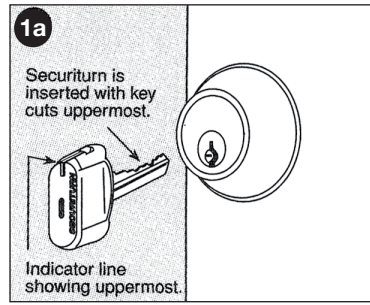

Using Securiturn™

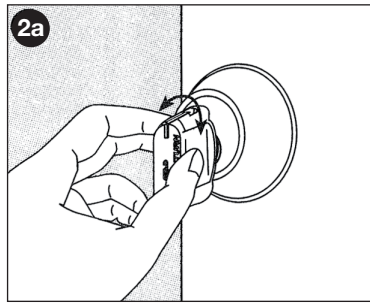


Removal of Securiturn™

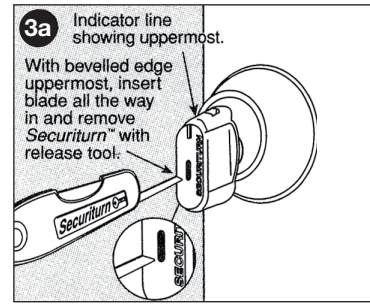


Instructions - For use with Interlock Emergency "E" Type Euro Cylinders

Inserting Securiturn™

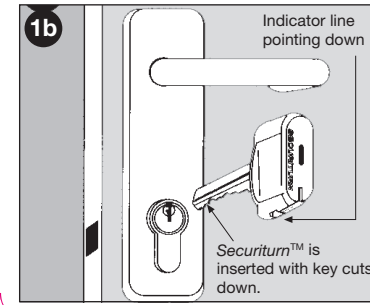

Removal of Securiturn™

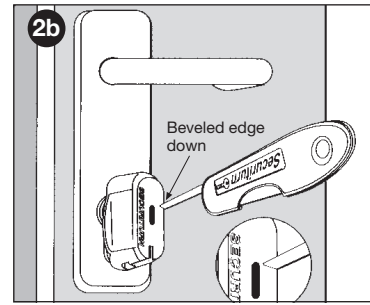

3b Note

When used in Standard Euro cylinders key access from the outside will be prevented by turning the Securiturn™ from the correct vertical position (see diagram below). Because of this, do not leave the Securiturn in the inside cylinder of the main access door as key entry will be prevented.

