



The Interlock flush bolt range is used for the safe bolting of aluminium doors and windows. The 7mm diameter plated steel rod provides high security and is activated by a strongly constructed die-cast zinc body and operating lever with comfortable finger grip.

## Features

- All flush bolts are supplied as standard with a 300mm rod threaded for 150mm along its length, enabling the rod to be factory trimmed to suit varying door/window heights
- A rod guide is also supplied for fitting inside the door/window frame
- A 600mm rod option is also available

## Options


The range has three variants-

- **Surface-mounted model** with standard width face plate, can be mounted either on the face or on the leading edge of a door stile
- **Surface-mounted narrow face plate**, is suitable for bi-fold windows as well as doors because of its smaller lines
- **Recessed model**, has a shorter overall length and is recessed into a door stile to give a smooth, flush appearance.
- Sizes and types to suit both doors and windows
- Available in a range of colours to match decor

# Flush Bolts


INTERLOCK™

ASSA ABLOY

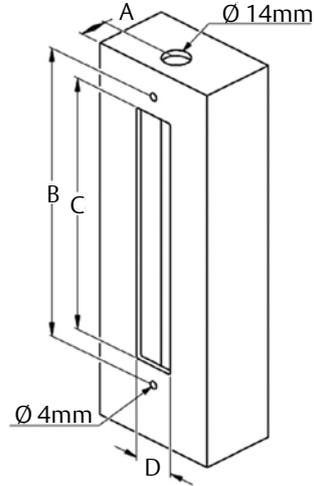


	A	B	C	D
P3512 Surface Mounted	13	155	120	20
P3513 Recess Mounted	17.5*	129	110	23
P3514 Surface Mounted Narrow	15	155	120	18


\* Measured from inside of extrusion

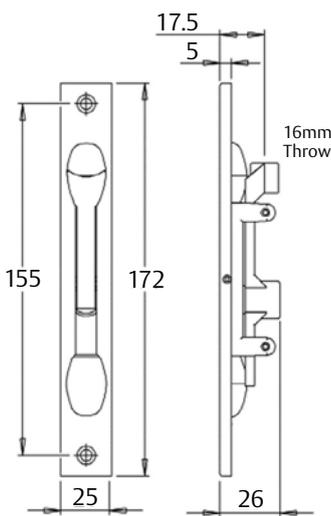

Surface Mounted  
P3512

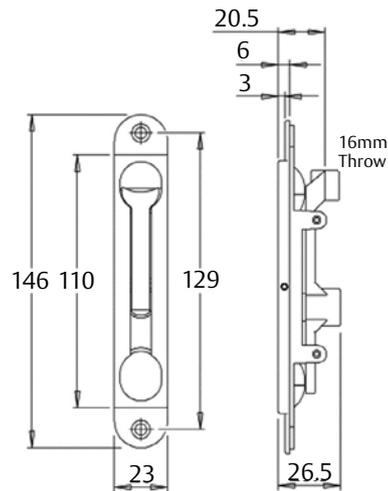

Recessed  
P3513

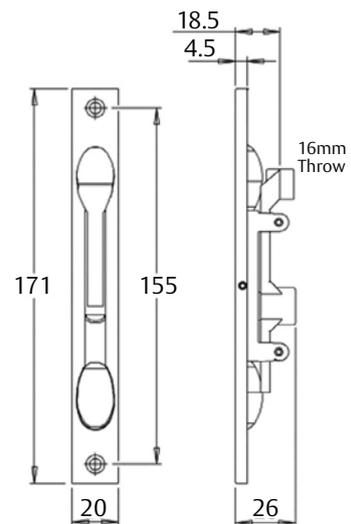

Surface Mounted  
Narrow Plate  
P3514

RES-FEY-046\_1217