

## STRAIGHT SLIDING 301

For timber or metal top hung sliding doors. Max 300, 400 or 450kg

### APPLICATION

- Designed for commercial, industrial and agricultural applications
- Designed to accommodate single or multiple panels on one or more tracks
- Versatile range of hanger, track, bracket and guide options, allows the 301 system to be used in a wide range of applications
- Where doors are fitted externally, a canopy is recommended
- Suitable for Fire Resistant applications

### DOOR SPECIFICATION

Track System	301	301H
For Individual Doors:		
Max Door Wt Nylon Hanger	400kg	450kg
Max Door Wt Steel Hanger	300kg	360kg
Door Thickness	43-57mm*	43-57mm*
Max Door Height	3600mm	4200mm

\* For doors outside the recommended door thickness, please contact our technical sales team for further information.

### HARDWARE SPECIFICATION

**Track** **H301 or H301H** Galvanised Steel (2000, 2500, 3000, 4000 & 6000mm lengths)  
Fix spacing at 900mm centres (maximum)

Brackets	Aluminium	Steel (Zinc plated)
<b>H1A/301</b>	<b>H1/301S</b>	Face fix, single track
<b>H3A/301</b>	<b>H3/301S</b>	Soffit fix, single track
<b>H4A/301</b>	<b>H4/301S</b>	Soffit fix (in line), single track
-	<b>H4R/301S</b>	Soffit fix (adjustable), single track
<b>H5/301</b>	-	Face fix, double track
<b>H6/301</b>	-	Soffit fix, double track
-	<b>H7/301S</b>	Face fix, triple track
-	<b>H8/301S</b>	Soffit fix, triple track
-	<b>H9/301S</b>	Face fix (low headroom), single track


For closed and jointing bracket option please contact our Technical Sales Team.





Hangers (2 per door)*	Steel wheels	Nylon wheels
<b>H52A/S</b>	<b>H52A/N</b>	Timberdoors - angle plate fixing
<b>H53A/S</b>	<b>H53A/N</b>	Timber doors - apron fixing
<b>H56A/S</b>	<b>H56A/N</b>	Metal doors - angle frame
<b>H56AX/S</b>	<b>H56AX/N</b>	Metal doors - box frame
<b>H57A/S</b>	<b>H57A/N</b>	Timber/metal doors - concealed plate
- All hangers suffixed 'N' have silent running nylon wheels and 'S' have steel wheels.		
- Nylon wheeled hangers should not be used on installations involving temperatures exceeding 80°C		

\* Each panel must be rigid enough to be supported by only two hangers

Guides	H31D	Wall guide, double
	<b>H31S</b>	Wall guide, single
	<b>H102/97</b>	Timber doors
	<b>H104P/97</b>	Metal doors - angle frame
	<b>H104PX/97</b>	Metal doors - box frame
	<b>H106R/97</b>	Timber doors - concealed fixing
	<b>H126H</b>	Ground stay roller
	<b>H128</b>	Shoe guide
All steel parts are electro zinc-plated.		

Channels	H97	Galvanised steel (1800, 2000, 2500, 3000, 4000 & 6000mm lengths) Pre-drilled for lugging into concrete and for use in drainage funnel.
----------	-----	--

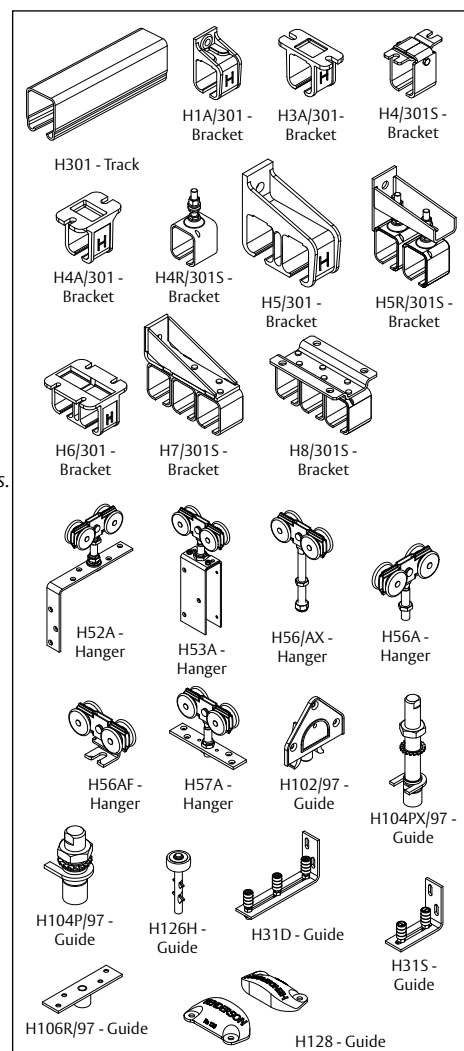

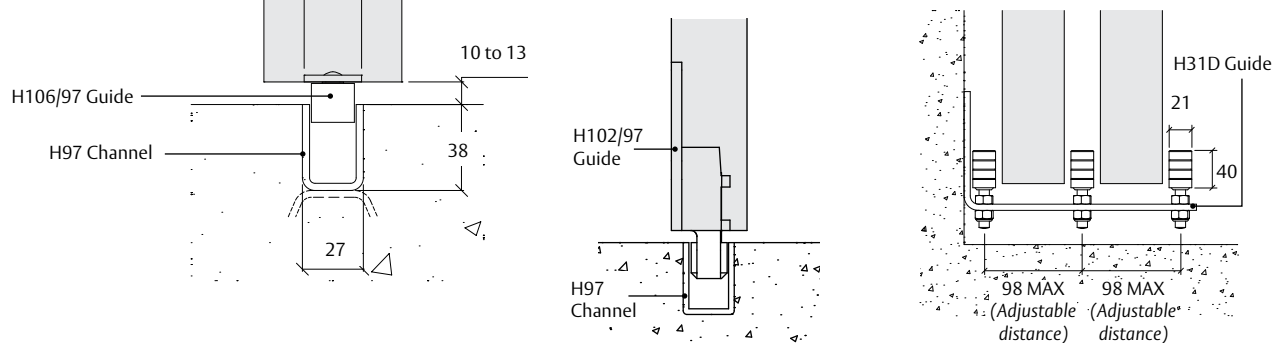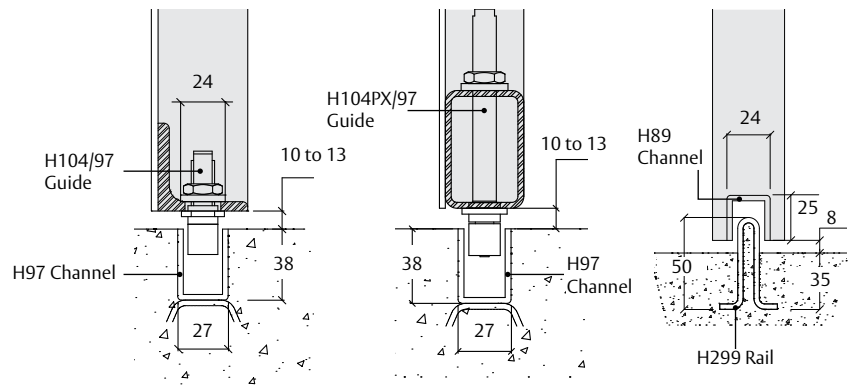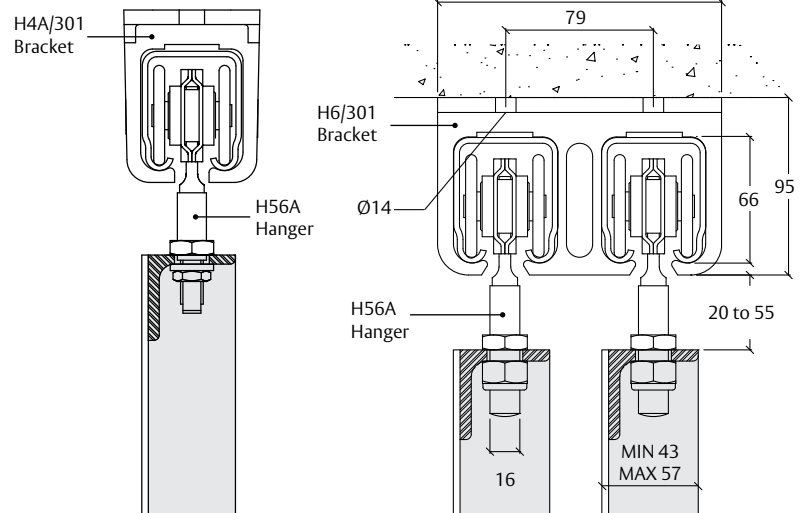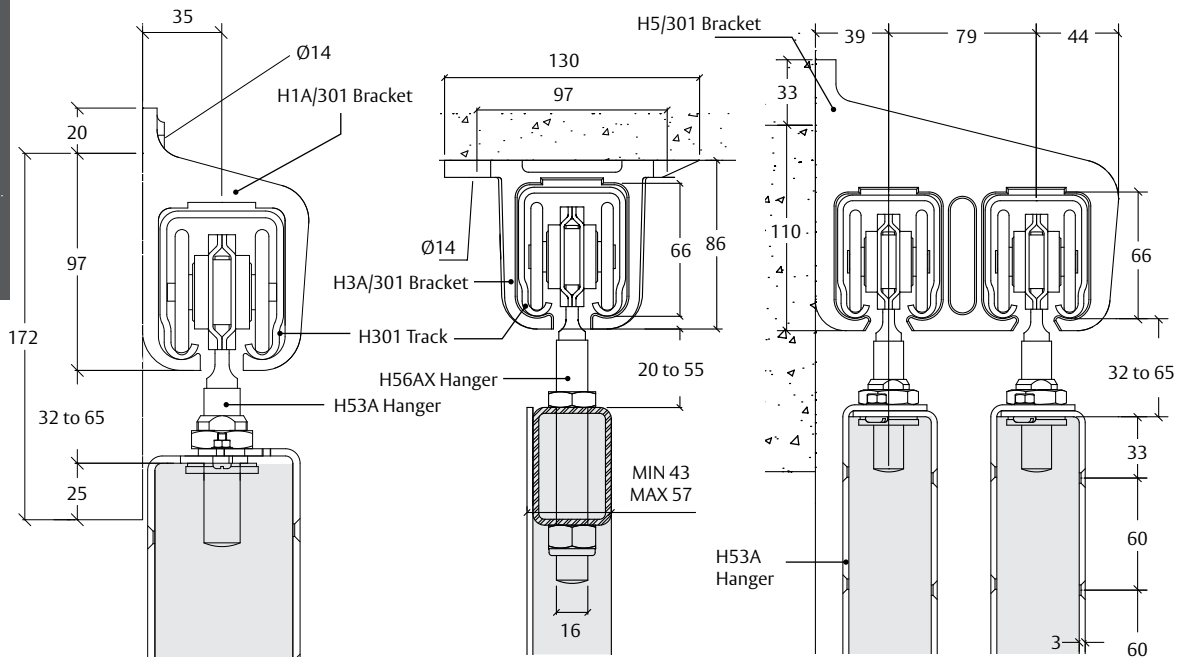

NOT TO SCALE

MIN 43  
MAX 57