interior folding systems

# **SOLTAIRE PIVOTFOLD**

### For top hung interior pivot folding partitions. Max 75kg each leaf.

#### **APPLICATION**

- Manufactured from high grade 316 stainless steel with anodised aluminium track
- Suitable for residential and commercial pivot folding partition
- The folding unit is not hinged to the jamb, but is pivoted in the track and off the floor
- To cover any width of opening, any number of folding units can be used
- Folding units of up to eight leaves can be pivoted from a post
- Floating units can consist of four, six or eight leaves

#### **DOOR SPECIFICATION**

Track System	Soltaire 45	Soltaire 75
For Individual Door Leaves:		
Max Panel Weight	45kg	75kg
Max Panel Width	900mm	900mm
Panel Thickness	35-56mm	35-56mm
Max Panel Height	3000mm	3300mm

#### HARDWARE SPECIFICATION

Track System	Soltaire 45	Soltaire 75
Track	H180A	H250A
	A d: d l	. (2000 2000

Anodised aluminium (2000, 3000, 4000 & 6000mm lengths)

Soffit fix spacing 900mm centres (maximum)

**Brush Strips BS10**, **BS15**, Available in black in 4 brush heights, by the metre

BS20, BS25 (mm)

**Brackets** H1/SS Face fixed stainless steel

Starting 20mm from end of track fix at 900mm maximum centres.

HangersH21/180/SSTimber doors 45kg 4 wheelH21/250/SSTimber doors 75kg 4 wheel

Pivots H21/SS/P Top and bottom pivot channel fix H21/SS/PNC Top and bottom pivots no channel

**Track Stop HH5/SS** Anodised aluminium with rubber buffer

**Hinges HSF3S** Non-mortice hinge handle set

(includes 2 hinges and 1 hinge handle)

**HSF5S** Non-mortice hinge set (includes 3 hinges)

**H100X75LPSS** Stainless steel butt hinge

**H100X75DHSS** Stainless steel D Handle butt hinge

**Guides H21SS/94** Angle plate fixing stainless steel

**Channels H94X** Aluminium (2000, 3000, 4000 & 6000mm lengths)

**H94** Brass (4000 & 6000mm lengths)

H89SS Stainless steel (2000 & 3000mm lengths)

**H94P** Polypropylene (2000, 3000, 4000 & 6000mm lengths) **H94PSC** Aluminium supporting channel and polypropylene


(2000, 3000, 4000 & 6000mm lengths)

**Flushbolts H190S** 190mm flushbolt non-locking

H190LS 190mm flushbolt locking
H450S 450mm flushbolt locking
H450LS 450mm flushbolt locking
H600S 600mm flushbolt non-locking
H600LS 600mm flushbolt locking


Flush Pulls

## IMAGE COMING SOON

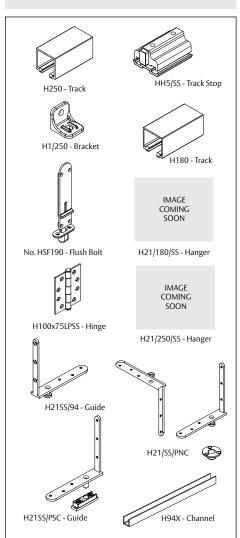

D40



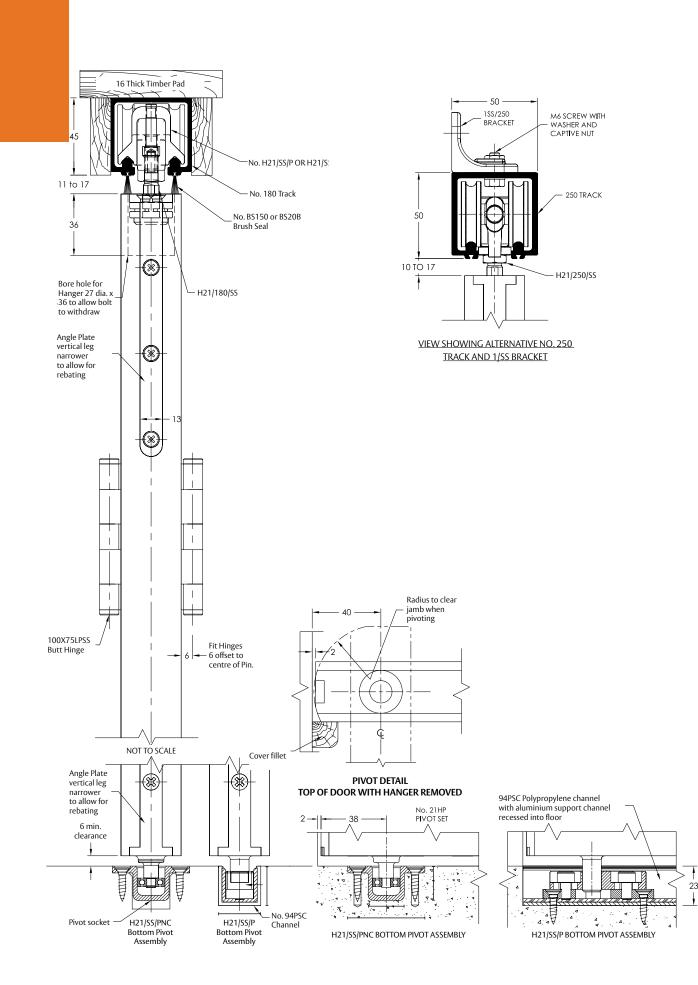

ASSA ABLOY New Zealand Ltd. PO Box 100407, North Shore, Auckland 0745 • 6 Armstrong Road, Albany, Auckland 0632, New Zealand Within New Zealand: Tel 99 415 8031 Fax 0800 478 297 www.assaabloy.co.nz • Outside New Zealand: Tel +64 9 921 7630 Fax +64 9 415 7222 www.assaabloy.co.nz